


## DEFENDER LP TP

SEMI-AUTOMATIC LOW-PROFILE STRETCH-WRAPPER WITH TOP PLATEN

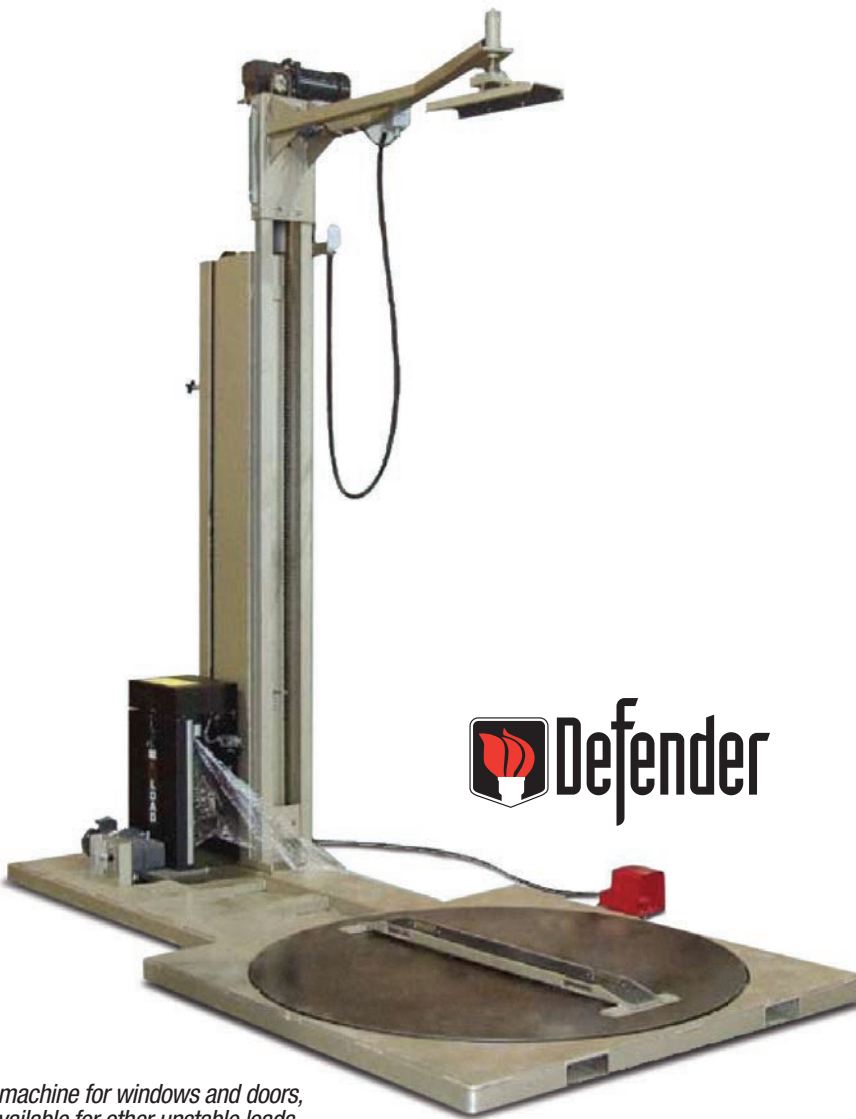

 **Defender**

### Features

- Supports tall narrow products
- Up to 300% pre-stretch
- Foot-pedal controlled platen
- Electric platen drive
- E Z Load film carriage
- Load-cell controlled film tension
- Fork-lift portable
- Compact footprint
- Optional removable jig on turntable

*\*Photo depicts machine for windows and doors,  
other fixtures available for other unstable loads*



# DEFENDER LP TP

## SEMI-AUTOMATIC LOW-PROFILE STRETCH-WRAPPER WITH INTEGRATED PLATEN

Used where the application requires the product be supported from the top while wrapping due to load instability, the Defender LP TP allows the user to wrap non-traditional loads. Examples include very light palletized loads, windows, doors, or cabinets.

The operator loads the turntable and supports the product while lowering the top platen with the foot switch. Once the load is supported by the platen, the film is attached to the load and the operator initiates the wrap cycle. After wrapping the load, the operator provides support to the product and raises the platen by actuating the footswitch.

Jigs on the turntable can be made removable to allow the machine to wrap traditional pallet loads as well as the specialized ones.

### Standard Features

- Solid state PLC control
- Manual control functions
- 1/2 HP carriage lift motor
- 1/2 HP platen lift motor
- EZ-Load film carriage
- Load-cell actuated film tension control eliminates moving parts.
- Forklift portable from front or rear of machine
- Film carriage contained within machine frame footprint for protection of operator.
- ANSI #50 chain turntable and carriage lift drive
- Up to 300% film pre-stretch
- Removable support fixture on turntable
- Adjustable film tension
- Adjustable turntable speed to 14 RPM
- Non-proprietary parts

### Available Options

- 30" film carriage
- Integrated weigh scale
- Radio remote control
- Larger load sizes
- 6,000 lb capacity turntable

### Specifications

Electrical Supply:	110V, 1 phase, 15 amp.
Load Size:	52" x 52" x 90" high
Load Weights:	Up to 4000 lbs
Production:	Up to 40 loads per hour (depending on configuration)

*Features and specifications subject to change without notice*

Represented By:

DEFENDER LPTP-02/16 116234

Samuel Strapping Systems  
Packaging and Unitizing Solutions

U.S.A. - 1-800-323-4424 Canada - 1-800-607-8727

[www.samuelstrapping.com](http://www.samuelstrapping.com)  
[www.youtube.com/samuelstrapping](http://www.youtube.com/samuelstrapping)